



Pressure/Vacuum Relief Valve

Deflagration-proof and Endurance Burning-proof

PROTEGO® PV/EBR

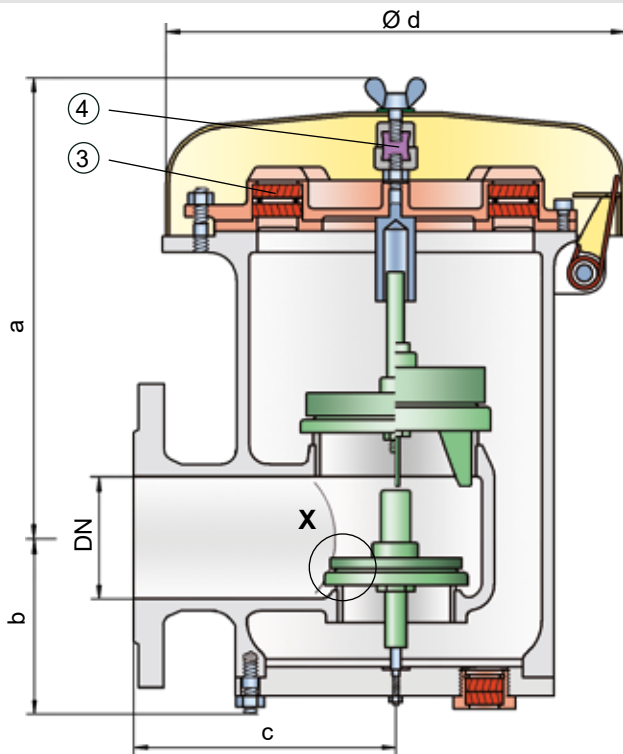

Detail X

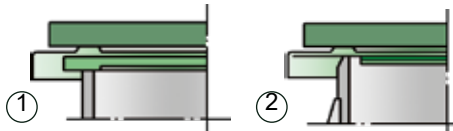

Settings:

pressure:	+2.0 mbar	up to	+210 mbar
	+0.8 inch W.C.	up to	+84 inch W.C.
vacuum:	-14 mbar	up to	-50 mbar
	-5.6 inch W.C.	up to	-20 inch W.C.
vacuum:	-3.5 mbar	up to	-14 mbar
	-1.4 inch W.C.	up to	-5.6 inch W.C.

For pressure up to max. + 150 mbar / 60.2 inch W.C.

Higher and lower settings upon request.

Function and Description

The deflagration-proof and endurance burning-proof PV/EBR type PROTEGO® valve is a highly developed combined pressure/ vacuum relief valve for high flow capacities with an integrated flame arrester. It is primarily used as a safety device for flame transmission-proof in-breathing and out-breathing on tanks, containers, and process equipment. The valve offers reliable protection against overpressure and vacuum, prevents the in-breathing of air and product losses almost up to the set pressure, and protects against atmospheric deflagration and endurance burning if stabilized burning occurs. The PROTEGO® flame arrester unit is designed to achieve minimum pressure drop with maximum safety. PROTEGO® PV/EBR valves are available for substances from explosion groups IIA to IIB3 (NEC group D to C MESH ≥ 0.65 mm).

The valve functions proportional, so the set pressures should be selected in relation to the proportional behavior (such as a 10%, 40%, or 100% overpressure from the set pressure to the relieving pressure at which the required flow performance is reached).

The tank pressure is maintained up to the set pressure with a tightness that is above the normal standards due to our state-of-the-art manufacturing technology. This feature is ensured by the valve seats made of high quality stainless steel and with individually lapped valve pallets (1), or with an air cushion seal (2), in conjunction with high quality FEP diaphragm. The valve pallets are also available with a PTFE seal to prevent the valve pallets from sticking when sticky substances are used and to enable the use of corrosive fluids. After the overpressure is released, the valve re-seats and provides a tight seal.

If the set pressure is exceeded, explosive gas/product vapor/air mixtures are released into the atmosphere. If this mixture ignites, the integrated PROTEGO® flame arrester unit (3) prevents flame transmission into the tank. If additional mixture continues to flow and stabilized burning occurs, the integrated flame arrester unit prevents flashback as a result of endurance burning. The valve is protected and also fulfils its function under these severe conditions. The spring-loaded weather hood opens as soon as the melting element (4) melts.

The valve can be used at an operating temperature of up to +60°C / 140°F and meets the requirements of European tank design standard EN 14015 (Appendix L) and ISO 28300 (API 2000).

Type-approved in accordance with the current ATEX Directive, as well as other international standards.

Special Features and Advantages

- excellent tightness, resulting in lowest possible product losses and environmental pollution
- due to 10% technology, set pressure is close to opening pressure for optimum pressure maintenance in the system as compared to conventional 40% or 100% technology
- valve opens later and closes earlier than conventional valves
- valve pallet is guided inside the housing to protect against harsh weather conditions
- can be used as a protective system in areas with potentially explosive atmospheres in accordance with ATEX
- high flow capacity due to larger FLAMEFILTER® cross section
- PROTEGO® flame arrester unit provides protection against atmospheric deflagrations and endurance burning
- integrated PROTEGO® flame arrester unit saves space and weight and reduces costs
- PROTEGO® flame arrester unit is protected from clogging and sticky substances caused by product vapors
- minimum pressure loss of the PROTEGO® flame arrester unit
- flameproof condensate drain
- maintenance-friendly design
- modular design enables replacement of individual FLAMEFILTER® discs and valve pallet
- available in a special design with lifting device



Demonstration of endurance burning
Video

Design Types and Specifications

Almost any combination of vacuum and pressure levels can be set for the valve. The valve pallets are weight-loaded. When the difference between the pressure and vacuum exceeds 150 mbar / 60.2 inch W.C., special valve pallets are used.

There are two different designs:

- Pressure/vacuum relief valve, basic design **PV/EBR-**
 - Pressure /vacuum relief valve with heating jacket **PV/EBR-**
(max. heating fluid temperature +85°C / 185°F)
- Additional special devices available upon request.

Table 1: Dimensions

Dimensions in mm / inches

To select the nominal size (DN), please use the flow capacity charts on the following page.

DN	80 / 3"	80 / 3"	100 / 4"	100 / 4"
Set pressure	≤ +35 mbar ≤ +14 inch W.C.	> +35 mbar > +14 inch W.C.	≤ +35 mbar ≤ +14 inch W.C.	> +35 mbar > +14 inch W.C.
a	345 / 13.58	475 / 18.70	345 / 13.58	475 / 18.70
b	141 / 5.55	141 / 5.55	141 / 5.55	141 / 5.55
c	218 / 8.58	218 / 8.58	218 / 8.58	218 / 8.58
d	353 / 13.90	353 / 13.90	353 / 13.90	353 / 13.90

Dimensions for pressure/
vacuum relief valve with
heating jacket upon request.

Table 2: Selection of explosion group

MESG	Expl. Gr. (IEC/CEN)	Gas Group (NEC)
> 0,90 mm	IIA	D
≥ 0,65 mm	IIB3	C

Special approvals upon request.

Table 3: Material selection for housing

Design	B	C
Housing	Steel	Stainless Steel
Heating jacket (PV/EBR-H-...)	Steel	Stainless Steel
Valve seats	Stainless Steel	Stainless Steel
Weather hood	Steel	Stainless Steel

Special materials upon request.

Table 4: Material combination of flame arrester unit

Design	A
FLAMEFILTER® casing	Stainless Steel
FLAMEFILTER®	Stainless Steel
Spacer	Stainless Steel

Special materials upon request.

Table 5: Material selection for pressure valve pallet

Design	A	B	C	D
Pressure range (mbar) (inch W.C.)	+2.0 up to +3.5 +0.8 up to +1.4	>+3.5 up to +14 >+1.4 up to +5.6	>+14 up to +210 >+5.6 up to +84	>+35 up to +210 >+14 up to +84
Valve pallet	Aluminum	Stainless Steel	Stainless Steel	Stainless Steel
Sealing	FEP	FEP	Metal to Metal	PTFE

Special materials and
higher set pressures upon
request.

Table 6: Material selection for vacuum pallet

Design	A	B	C	D
Vacuum range (mbar) (inch W.C.)	-3.5 up to -5.0 -1.4 up to -2.0	<-5.0 up to -14 <-2.0 up to -5.6	<-14 up to -50 <-5.6 up to -20	<-14 up to -50 <-5.6 up to -20
Valve pallet	Aluminum	Stainless Steel	Stainless Steel	Stainless Steel
Sealing	FEP	FEP	Metal to Metal	PTFE


Special materials and
higher set vacuum upon
request.

Table 7: Flange connection type

EN 1092-1; Form B1	Other types upon request.
ASME B16.5 CL 150 R.F.	





for safety and environment



Pressure/Vacuum Relief Valve

Flow Capacity Charts

PROTEGO® PV/EBR

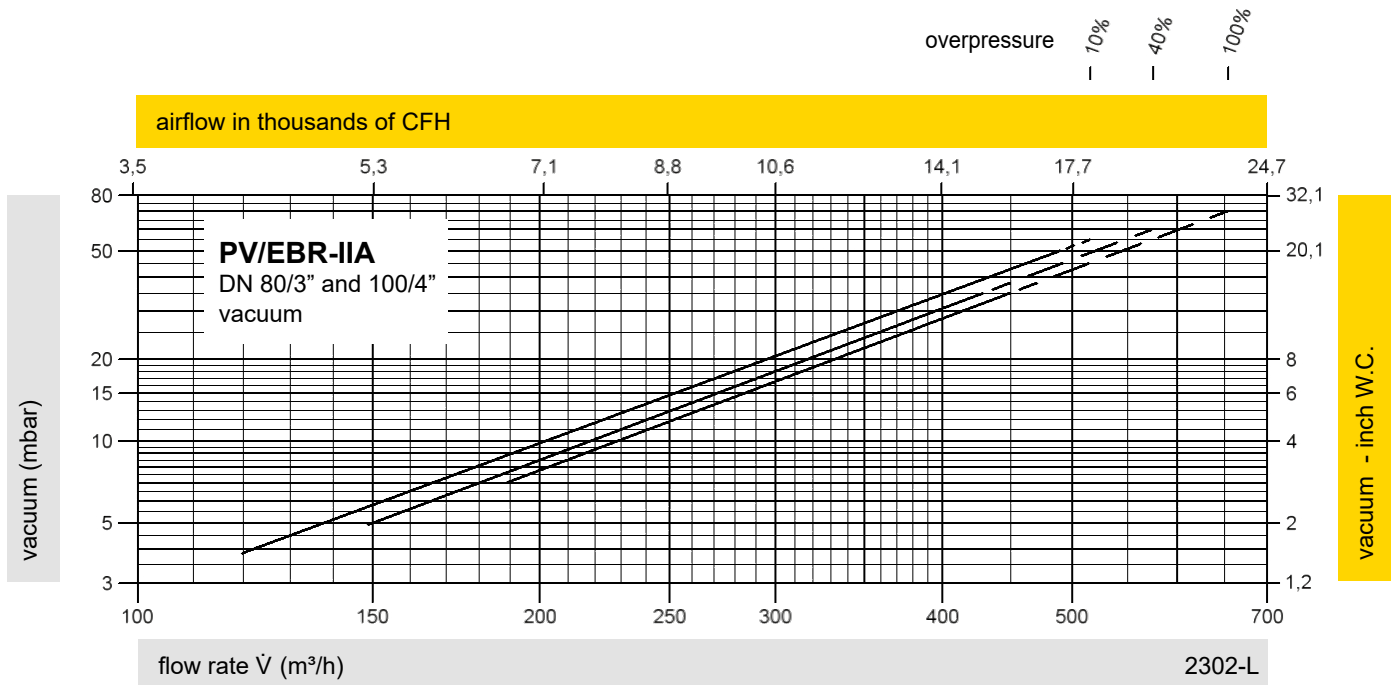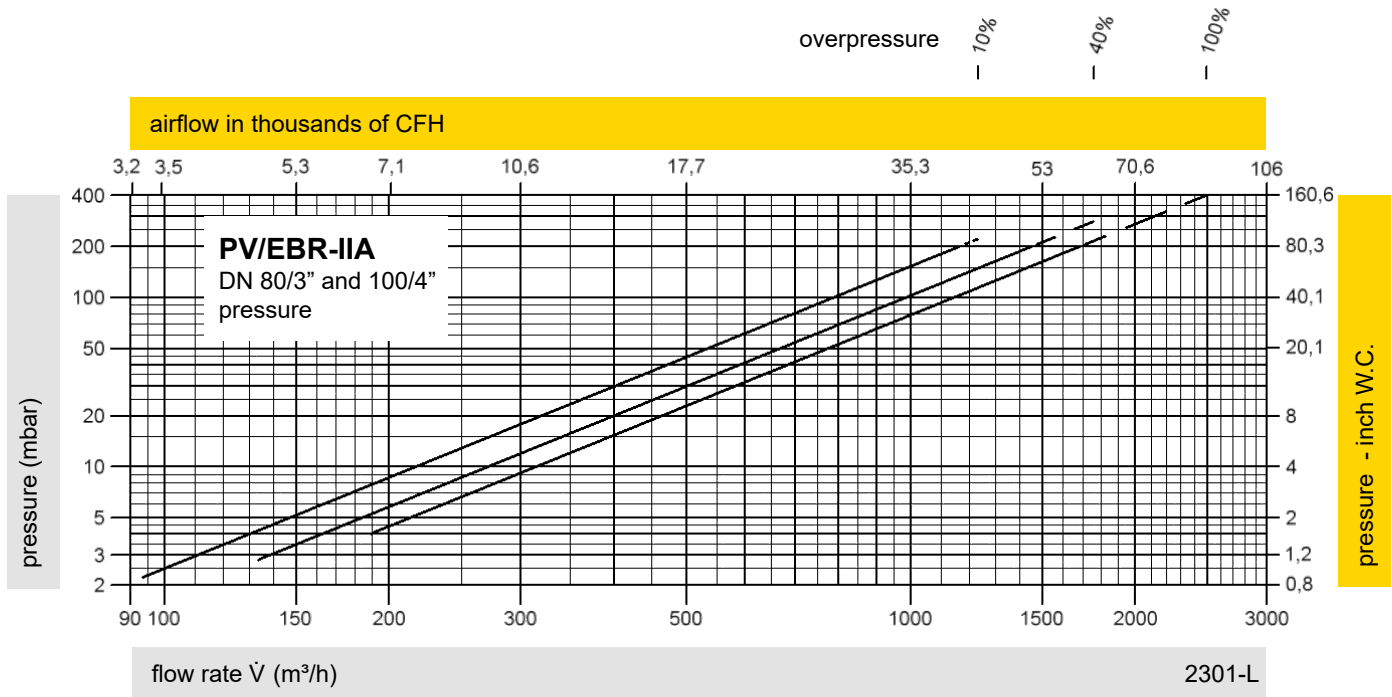

Remark

$$\text{set pressure} = \frac{\text{opening pressure resp. tank design pressure}}{1 + \frac{\text{overpressure \%}}{100\%}}$$

Set pressure = the valve starts to open

Opening pressure = set pressure plus overpressure

Overpressure % = percentage pressure increase over the set pressure

The flow capacity charts have been determined with a calibrated and TÜV certified flow capacity test rig.

Volume flow \dot{V} in (m³/h) and CFH refer to the standard reference conditions of air in ISO 6358 (20°C, 1bar).

For conversion to other densities and temperatures, refer to Sec. 1: "Technical Fundamentals."

