


In-Line Deflagration Flame Arrester

for biogas, sewage gas and landfill gas, concentric design,
bidirectional

PROTEGO® FA-CN-IIA1

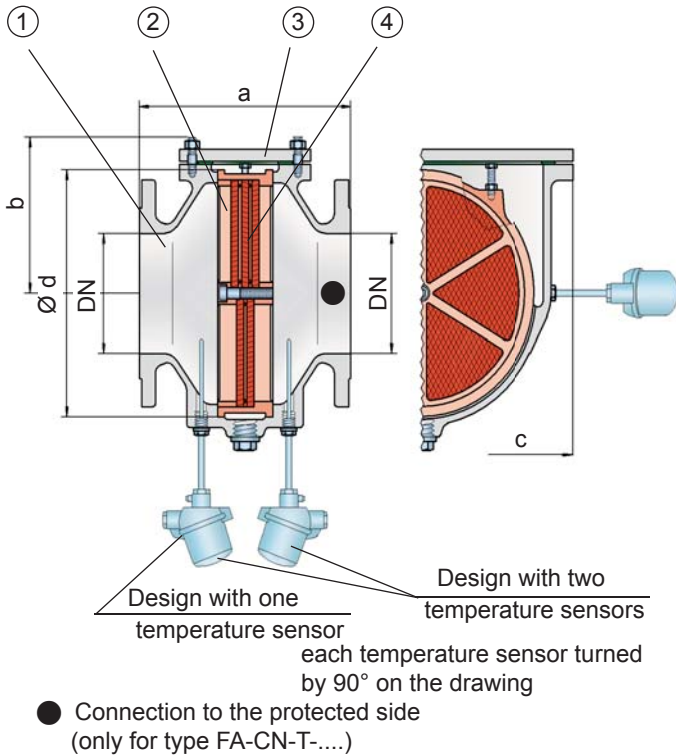

Function and Description

The deflagration and endurance burning-proof PROTEGO® FA-CN-IIA1 in-line flame arrester was specially developed for bio-, sewage- and landfill-gas applications. With this device it is possible to protect compressors with high operating pressures and high operating temperatures. It can also be used as an endurance-burning-proof in-line device under atmospheric conditions, without temperature monitoring. The PROTEGO® FA-CN-IIA1 deflagration flame arrester is a compact design utilizing an easy access cover for easy maintainability. The FLAMEFILTER® unit can be removed and cleaned within moments without having to disassemble the pipe. When installing the deflagration flame arrester, make sure that the distance between potential ignition sources and the location of the installed device, does not exceed the L/D ratio (pipe length/pipe diameter), for which the device was tested. For this device the (L/D)_{max} ratio is 50.

The in-line deflagration flame arrester is symmetrical and offers bidirectional flame transmission protection. The device consists of a housing (1) with an easy access cover (3) and the PROTEGO® flame arrester unit (2) in the center. The PROTEGO® flame arrester unit is modular and consists of several FLAMEFILTER® discs (3) and spacers firmly held in a FLAMEFILTER® cage. The number of FLAMEFILTER® discs and their gap size depend on the arrester's conditions of use.

By indicating the operating parameters such as temperature, pressure, explosion group and the composition of the fluid, the optimum deflagration flame arrester can be selected from a series of approved devices. This version of PROTEGO® FA-CN-IIA1 flame arrester protects against deflagrations and endurance burning of explosion group IIA1 – methane (former designation Expl.gr. I).

PROTEGO® FA-CN devices for substances of explosion groups IIA, IIB3 and IIC (NEC groups D, C, and B) are shown on separate pages.

The standard design can be used up to an operating temperature of +60°C / 140°F and an absolute operating pressure up to 2.0 bar / 29.0 psi (DN 40/1½" and DN 50/2") or 1,6 bar / 23.2 (DN 80/3" to DN 300/12"). Devices with special approval can be obtained for higher pressures (see table 3) and higher temperatures upon request.

Type-approved according to ATEX Directive and EN ISO 16852 as well as other international standards.

Special Features and Advantages

- state of the art design for bio-, sewage- and landfill gas applications
- design available for elevated operating temperatures and pressures
- compact design with easy access cover
- easy maintenance without disassembling of the pipeline
- modular flame arrester unit enables individual FLAMEFILTER® to be replaced and cleaned
- bidirectional flame transmission proof design
- provides protection against deflagrations and endurance burning for explosion group IIA1– methane (former designation Expl.gr. I)
- lowest pressure drop results in low operating and lifecycle costs
- modular design reduces spare parts cost

Design and Specifications

There are three different designs:

Basic in-line deflagration flame arrester **FA-CN - []**

In-line deflagration flame arrester with integrated temperature sensor* as additional protection against short-time burning from one side **FA-CN - [T]**

In-line deflagration flame arrester with two integrated temperature sensors* for additional protection against short-time burning from both sides **FA-CN - [TB]**

Additional special devices available upon request

*Resistance thermometer for device group II, category (1) 2 (GII cat. (1) 2)

Table 1: Dimensions

Dimensions in mm / inches

To select the nominal size (DN), use the flow capacity charts on the following pages

DN	40 / 1½"	50 / 2"	65 / 2½"	80 / 3"	100 / 4"	125 / 5"	150 / 6"	200 / 8"	250 / 10"	300 / 12"
a	210 / 8.27	215 / 8.46	235 / 9.25	240 / 9.45	265 / 10.43	305 / 12.01	310 / 12.20	300 / 11.81	320 / 12.60	350 / 13.78
b	105 / 4.13	105 / 4.13	132 / 5.2	132 / 5.2	150 / 5.91	197 / 7.75	197 / 7.75	220 / 8.66	260 / 10.24	295 / 11.61
c	200 / 7.87	200 / 7.87	260 / 10.24	260 / 10.24	308 / 12.13	415 / 16.34	415 / 16.34	446 / 17.56	520 / 20.47	600 / 23.62
d	130 / 5.12	130 / 5.12	185 / 7.28	185 / 7.28	220 / 8.66	310 / 12.20	310 / 12.20	355 / 13.98	420 / 16.54	490 / 19.29

Table 2: Selection of the explosion group

MESG	Expl. Gr. (IEC/CEN)	Special approvals upon request
> 1.14 mm	IIA1 (I)	

Table 3: Selection of max. operating pressure

DN	40 / 1½"	50 / 2"	65 / 2½"	80 / 3"	100 / 4"	125 / 5"	150 / 6"	200 / 8"	250 / 10"	300 / 12"
P _{max}	2.0 / 29.0	2.0 / 29.0	1.6 / 23.2	1.6 / 23.2	1.6 / 23.2	1.6 / 23.2	1.6 / 23.2	1.6 / 23.2	1.6 / 23.2	1.6 / 23.2
P _{max}	2.5 / 36.3	2.5 / 36.3	2.5 / 36.3	2.5 / 36.3	2.5 / 36.3	2.5 / 36.3	2.5 / 36.3	2.5 / 36.3		
P _{max}	4.5 / 65.3	4.5 / 65.3	4.5 / 65.3	4.5 / 65.3	4.5 / 65.3	4.5 / 65.3	4.5 / 65.3			
P _{max}			5.0 / 72.5	5.0 / 72.5						

P_{max} = maximum allowable operating pressure in bar / psi absolute, higher operating pressure upon request**Table 4: Specification of max. operating temperature**

≤ 60°C / 140°F	T _{maximum allowable operating temperature in °C/°F}	higher operating temperatures upon request
-	Designation	


Table 5: Material selection

Design	A	B	Special materials upon request
Housing	Steel	Stainless Steel	
Cover	Steel	Stainless Steel	
Gasket	PTFE	PTFE	
Flame arrester unit	Stainless Steel	Stainless Steel	

Tabelle 6: Flanschanschlussart

EN 1092-1; Form B1	andere Anschlüsse auf Anfrage
ASME B16.5; 150 lbs RFSS	






In-Line Deflagration Flame Arrester

Flow Capacity Charts


PROTEGO® FA-CN-IIA1

* see table 3

DN 40 / 1 1/2"
DN 50 / 2"
DN 65 / 2 1/2"
DN 80 / 3"
DN 100 / 4"
DN 125 / 5"
DN 150 / 6"
DN 200 / 8"
DN 250 / 10"
DN 300 / 12"

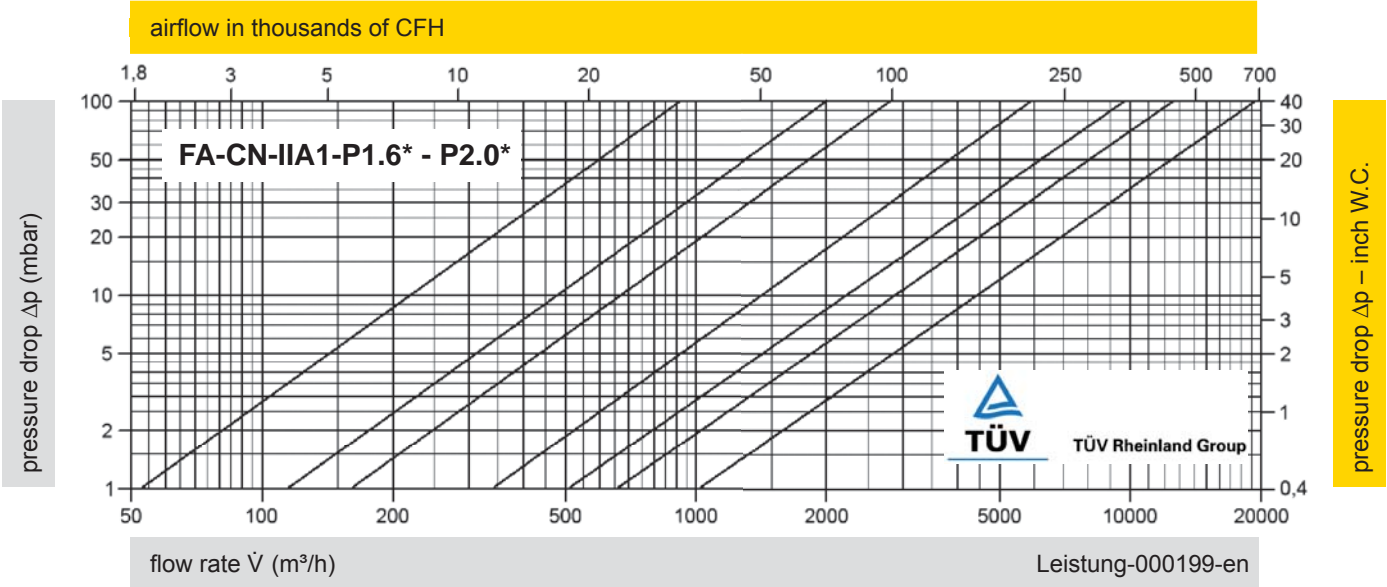

DN 40 / 1 1/2"
DN 50 / 2"
DN 65 / 2 1/2"
DN 80 / 3"
DN 100 / 4"
DN 125 / 5"
DN 150 / 6"
DN 200 / 8"

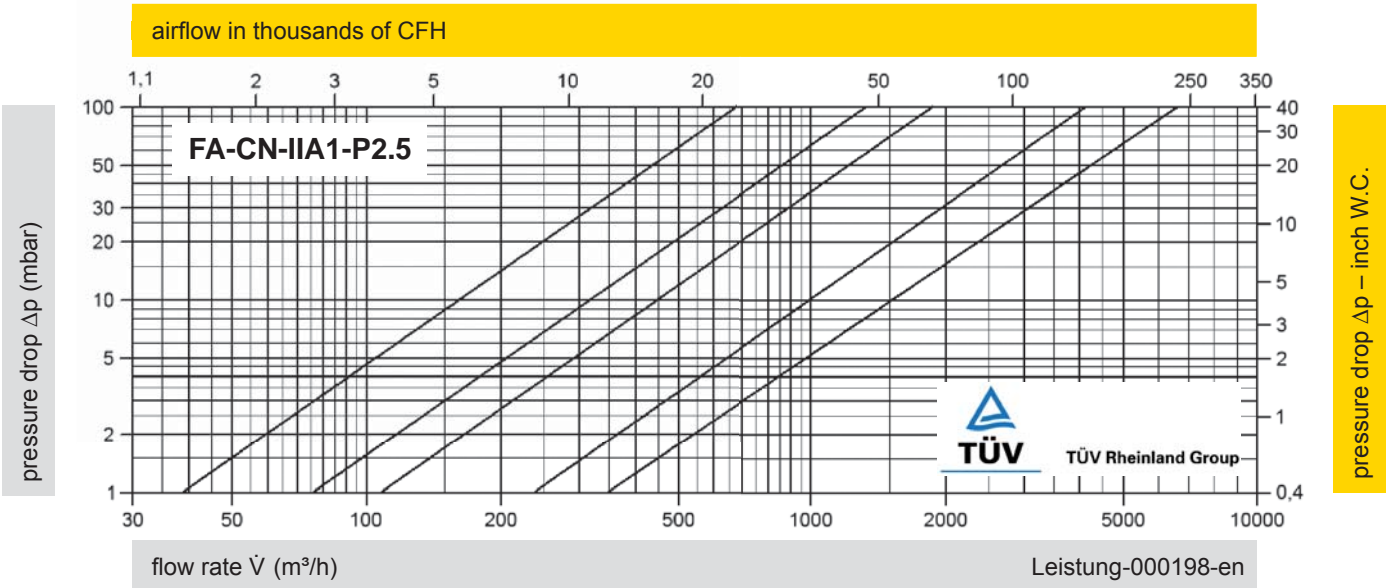

The flow capacity charts have been determined with a calibrated and TÜV certified flow capacity test rig. Volume flow \dot{V} in [m³/h] and CFH refer to the standard reference conditions of air ISO 6358 (20°C, 1bar). Conversion to other densities and temperatures refer to Vol. 1: "Technical Fundamentals".

